

EXISTING ROOF THIS AREA REQUIRED NO WORK ON TOP AREA. ONLY SIDES AND PARAPET OF ROOF AT LOWER ROOF

REMOVE EXISTING BRICK VENEER ON BOTH SIDES OF SMALL ROOF AND PATCH EDGE OF EXISTING MASONRY AS NEEDED.

DASHED LINE INDICATES APPROX. LOCATION OF EXTERIOR WALLS BELOW, VERIFY IN FIELD

n
roof demolition plan
 SCALE: 1/8" = 1'-0"


GENERAL DEMOLITION NOTES

1. DASHED LINES INDICATE WHICH ITEMS ARE TO BE DEMOLISHED.
2. THESE DRAWINGS ARE INTENDED TO SHOW THE GENERAL SCOPE OF DEMOLITION REQUIRED TO ACCOMPLISH THE NEW WORK. IT IS NOT INTENDED TO SHOW EVERY ITEM OF DEMOLITION. THE CONTRACTOR SHALL PERFORM ALL DEMOLITION NECESSARY TO ACCOMPLISH THE NEW WORK, INCLUDING THAT REQUIRED FOR MECHANICAL, ELECTRICAL AND PLUMBING. REFER TO SPECIFICATIONS FOR PRE-CONSTRUCTION SITE VISIT.
3. REMOVE MISCELLANEOUS NON-FUNCTIONAL ITEMS ATTACHED TO INTERIOR AND EXTERIOR WALLS AND BUILDING STRUCTURE. INCLUDED ARE SUCH ITEMS AS NAILERS, ANCHORS, ACCESSORIES, MECHANICAL, PLUMBING AND ELECTRICAL DEVICES, ETC.
4. ALL DAMAGED CEMENTITIOUS WOOD FIBER ROOF PANELS AT LOWER ROOF ARE TO BE REMOVED AND REPLACED. SEE GENERAL NOTES ON SHEET A101.

DEMOLITION NOTES

- 1 REMOVE EXISTING ROOFING, INSULATION AND NAILERS DOWN TO EXISTING CONCRETE STRUCTURE. PREP EXISTING CONCRETE STRUCTURE TO RECEIVE NEW ROOF SYSTEM.
- 2 REMOVE EXISTING GUTTER, FLASHING, DOWNSPOUTS AND SPLASH BLOCKS.
- 3 REMOVE EXISTING FASCIA AND NAILERS.
- 4 REMOVE EXISTING STOREFRONT AND SILL PAN. INSTALL NEW SILL PAN WITH END DAMNS SET IN FULL BED OF MASTIC OVER NEW COUNTER FLASHING FOR ROOF FLASHING.
- 5 REMOVE EXISTING EXHAUST VENT AND EXTEND DUCT AS REQUIRED TO CLEAR NEW GUTTER SYSTEM. RE-INSTALL IN ORIGINAL LOCATION.
- 6 REMOVE EXISTING FACEBRICK AS REQUIRED TO INSTALL NEW FLASHING SYSTEM.
- 7 REMOVE EXISTING LEAD FLASHING FROM EXISTING VENT THROUGH ROOF. EXTEND EXISTING PIPE TO 10" ABOVE NEW ROOF LINE. TYPICAL AT ALL VENTS THROUGH ROOF.
- 8 REMOVE EXISTING CAP AND BASE ON EXHAUST DUCTS THROUGH ROOF. REPLACE WITH NEW CURB AND VENTILATOR, CONNECT TO EXISTING DUCT AS REQUIRED.
- 9 REMOVE EXISTING FRESH AIR INTAKE. INSTALL NEW ROOF CURB. RE-INSTALL EXISTING EQUIPMENT IN ORIGINAL LOCATION.
- 10 REMOVE EXISTING MODIFIED BITUMEN ROOF. INSULATION AND EDGE NAILERS. PREP EXISTING CEMENTITIOUS WOOD FIBER ROOF STRUCTURE TO RECEIVE NEW TAPERED ROOF INSULATION.
- 11 REMOVE EXISTING ANTENNA AND ALL ASSOCIATED GUY WIRES.

Revision Schedule		Issued By
Tag	Rev. Description	Rev. Date

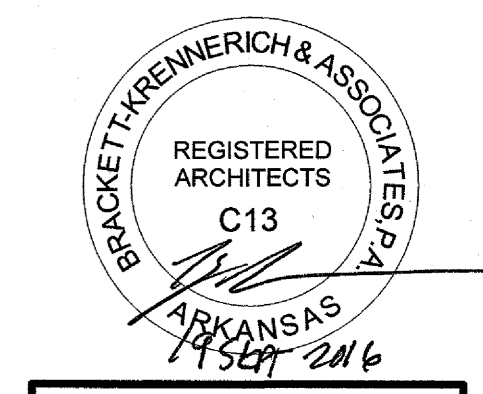

Commission Number
 10216
 ABA# - 9751644
A100
 Date: July 18, 2016

**BRACKETT
 KRENNERICH**
 architects

RE-ROOF FOR:
BEEBE READINESS CENTER
 Beebe, Arkansas