


1 KEY FLOOR PLAN
1/8" = 1'-0"

KEYNOTE LEGEND

- 1 SUNSHADE SYSTEM BY CURTAIN WALL MANUFACTURER
- 2 NEW STAIRS, GUARDRAILS, AND HANDRAILS TO UPPER STORAGE AREA
- 3 INFILL HOLE IN WALL WHERE DEMOLISHED DOOR WAS LOCATED WITH CONSTRUCTION TO MATCH ADJACENT, SEE PARTITION SCHEDULE
- 4 INFILL HOLE IN WALL WHERE DEMOLISHED WINDOW WAS LOCATED WITH CONSTRUCTION TO MATCH ADJACENT, SEE PARTITION SCHEDULE.
- 5 INFILL HOLE IN WALL WHERE TRASH RECEPTACLE WAS REMOVED WITH CMU TO MATCH ADJACENT CMU AND PAINT.
- 6 CUT OUT DAMAGED BLOCK, BOTH SIDES OF OPENING AND PROVIDE 8" CMU INFILL.
- 7 THE EXISTING NORTH, EAST AND WEST CMU WALL OF THE EXISTING VEHICLE STORAGE IS TO HAVE ALL CRACKS IN EXISTING MORTAR JOINTS REPOINTED AND ANY HOLE OR DAMAGED CMU ARE TO BE FILLED WITH 8" CMU
- 8 NEW ROOF ABOVE - SEE ROOF PLAN FOR MORE INFORMATION
- 9 EXISTING 6" PERFORATED PVC DRAIN PIPE BELOW GRADE. GENERAL CONTRACTOR TO FIELD LOCATE AND AVOID DISTURBING DURING THE DEMOLITION AND CONSTRUCTION PHASES OF THE PROJECT.

Stocks Mann
Architects, PLC
401 W. CAPITOL, SUITE 402
LITTLE ROCK, AR 72201
501-370-9207 501-370-9208 (FAX)

CONSULTANTS
DCI, Inc.
Civil Engineer
ROBBINS ENGINEERING
Structural Engineer
TME, LLC.
MEPF Engineer

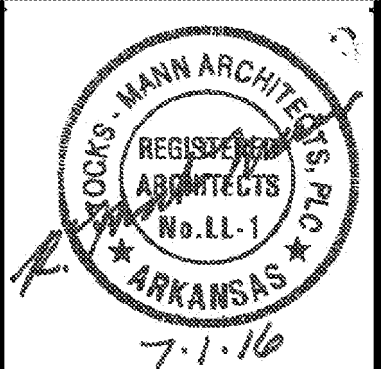

**Fire Station Renovation and
Police Station Addition**
Building 7200 - Camp Joseph T. Robinson
North Little Rock, Arkansas

GENERAL NOTES

- 1. DETAILS OF EXISTING CONDITIONS ARE BASED ON ORIGINAL DRAWINGS AND FIELD OBSERVATIONS. FIELD VERIFY ACTUAL CONDITIONS AT TIME OF CONSTRUCTION AND NOTIFY ARCHITECT IF THERE ARE ANY DISCREPANCIES OR CONFLICTS.
- 2. ALL DIMENSIONS ARE TO FINISH FACE UNLESS NOTED OTHERWISE. DO NOT SCALE DRAWINGS - WRITTEN DIMENSIONS TAKE PRECEDENCE OVER GRAPHIC REPRESENTATIONS. DETAIL DIMENSIONS TAKE PRECEDENCE OVER PLANS AND ELEVATIONS.
- 3. ALL DIMENSIONS REVISIONS, MODIFICATIONS, AND DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR REVIEW AND CLARIFICATION PRIOR TO THE INSTALLATION OF THE WORK.
- 4. PROVIDE ALL NECESSARY BLOCKING IN PARTITIONS FOR WALL MOUNTED ITEMS (DOORSTOPS, TOILET ACCESSORIES OWNER FURNISHED ITEMS, MILLWORK, MECHANICAL ELECTRICAL/DATA EQUIP., ETC.)
- 5. REFER TO CIVIL, STRUCTURAL MECHANICAL, ELECTRICAL AND FIRE PROTECTION PLANS FOR ITEMS BELOW GRADE CONSTRUCTION NOT SHOWN ON ARCHITECTURAL.
- 6. UNSCHEDULED CLOSETS OR ALCOVES ARE TO RECEIVE THE SAME FINISH AS THE ROOM IN WHICH THEY OCCUR.
- 7. COORDINATE MOUNTING HEIGHTS OF LIGHTING WITH ARCHITECT PRIOR TO WORK IF HEIGHTS OR LOCATIONS ARE NOT INDICATED.
- 8. GENERAL CONTRACTOR TO COORDINATE INTERRUPTION OF UTILITY SERVICES WITH CAMP ROBINSON A MINIMUM OF ONE WEEK PRIOR TO WORK ON UTILITIES.
- 9. REFER TO SHEET G1.2 AND PARTITION SCHEDULE FOR RATED WALLS. ANY PENETRATIONS THROUGH THESE WALLS ARE TO BE FIRE STOPPED PER DETAILS AS INDICATED ON G1.3. ANY PENETRATIONS THROUGH THE EXISTING CONCRETE DECK ARE TO BE FIRE STOPPED PER DETAILS AS INDICATED ON

REVISIONS

NO.	DESCRIPTION

ISSUE DATE
JULY 1, 2016
PROJECT NO.
0901U

CONTENTS
KEY FLOOR PLAN

SHEET NUMBER

A2.0