


2 EXISTING FLOOR PATCH DETAIL
1 1/2" = 1'-0"

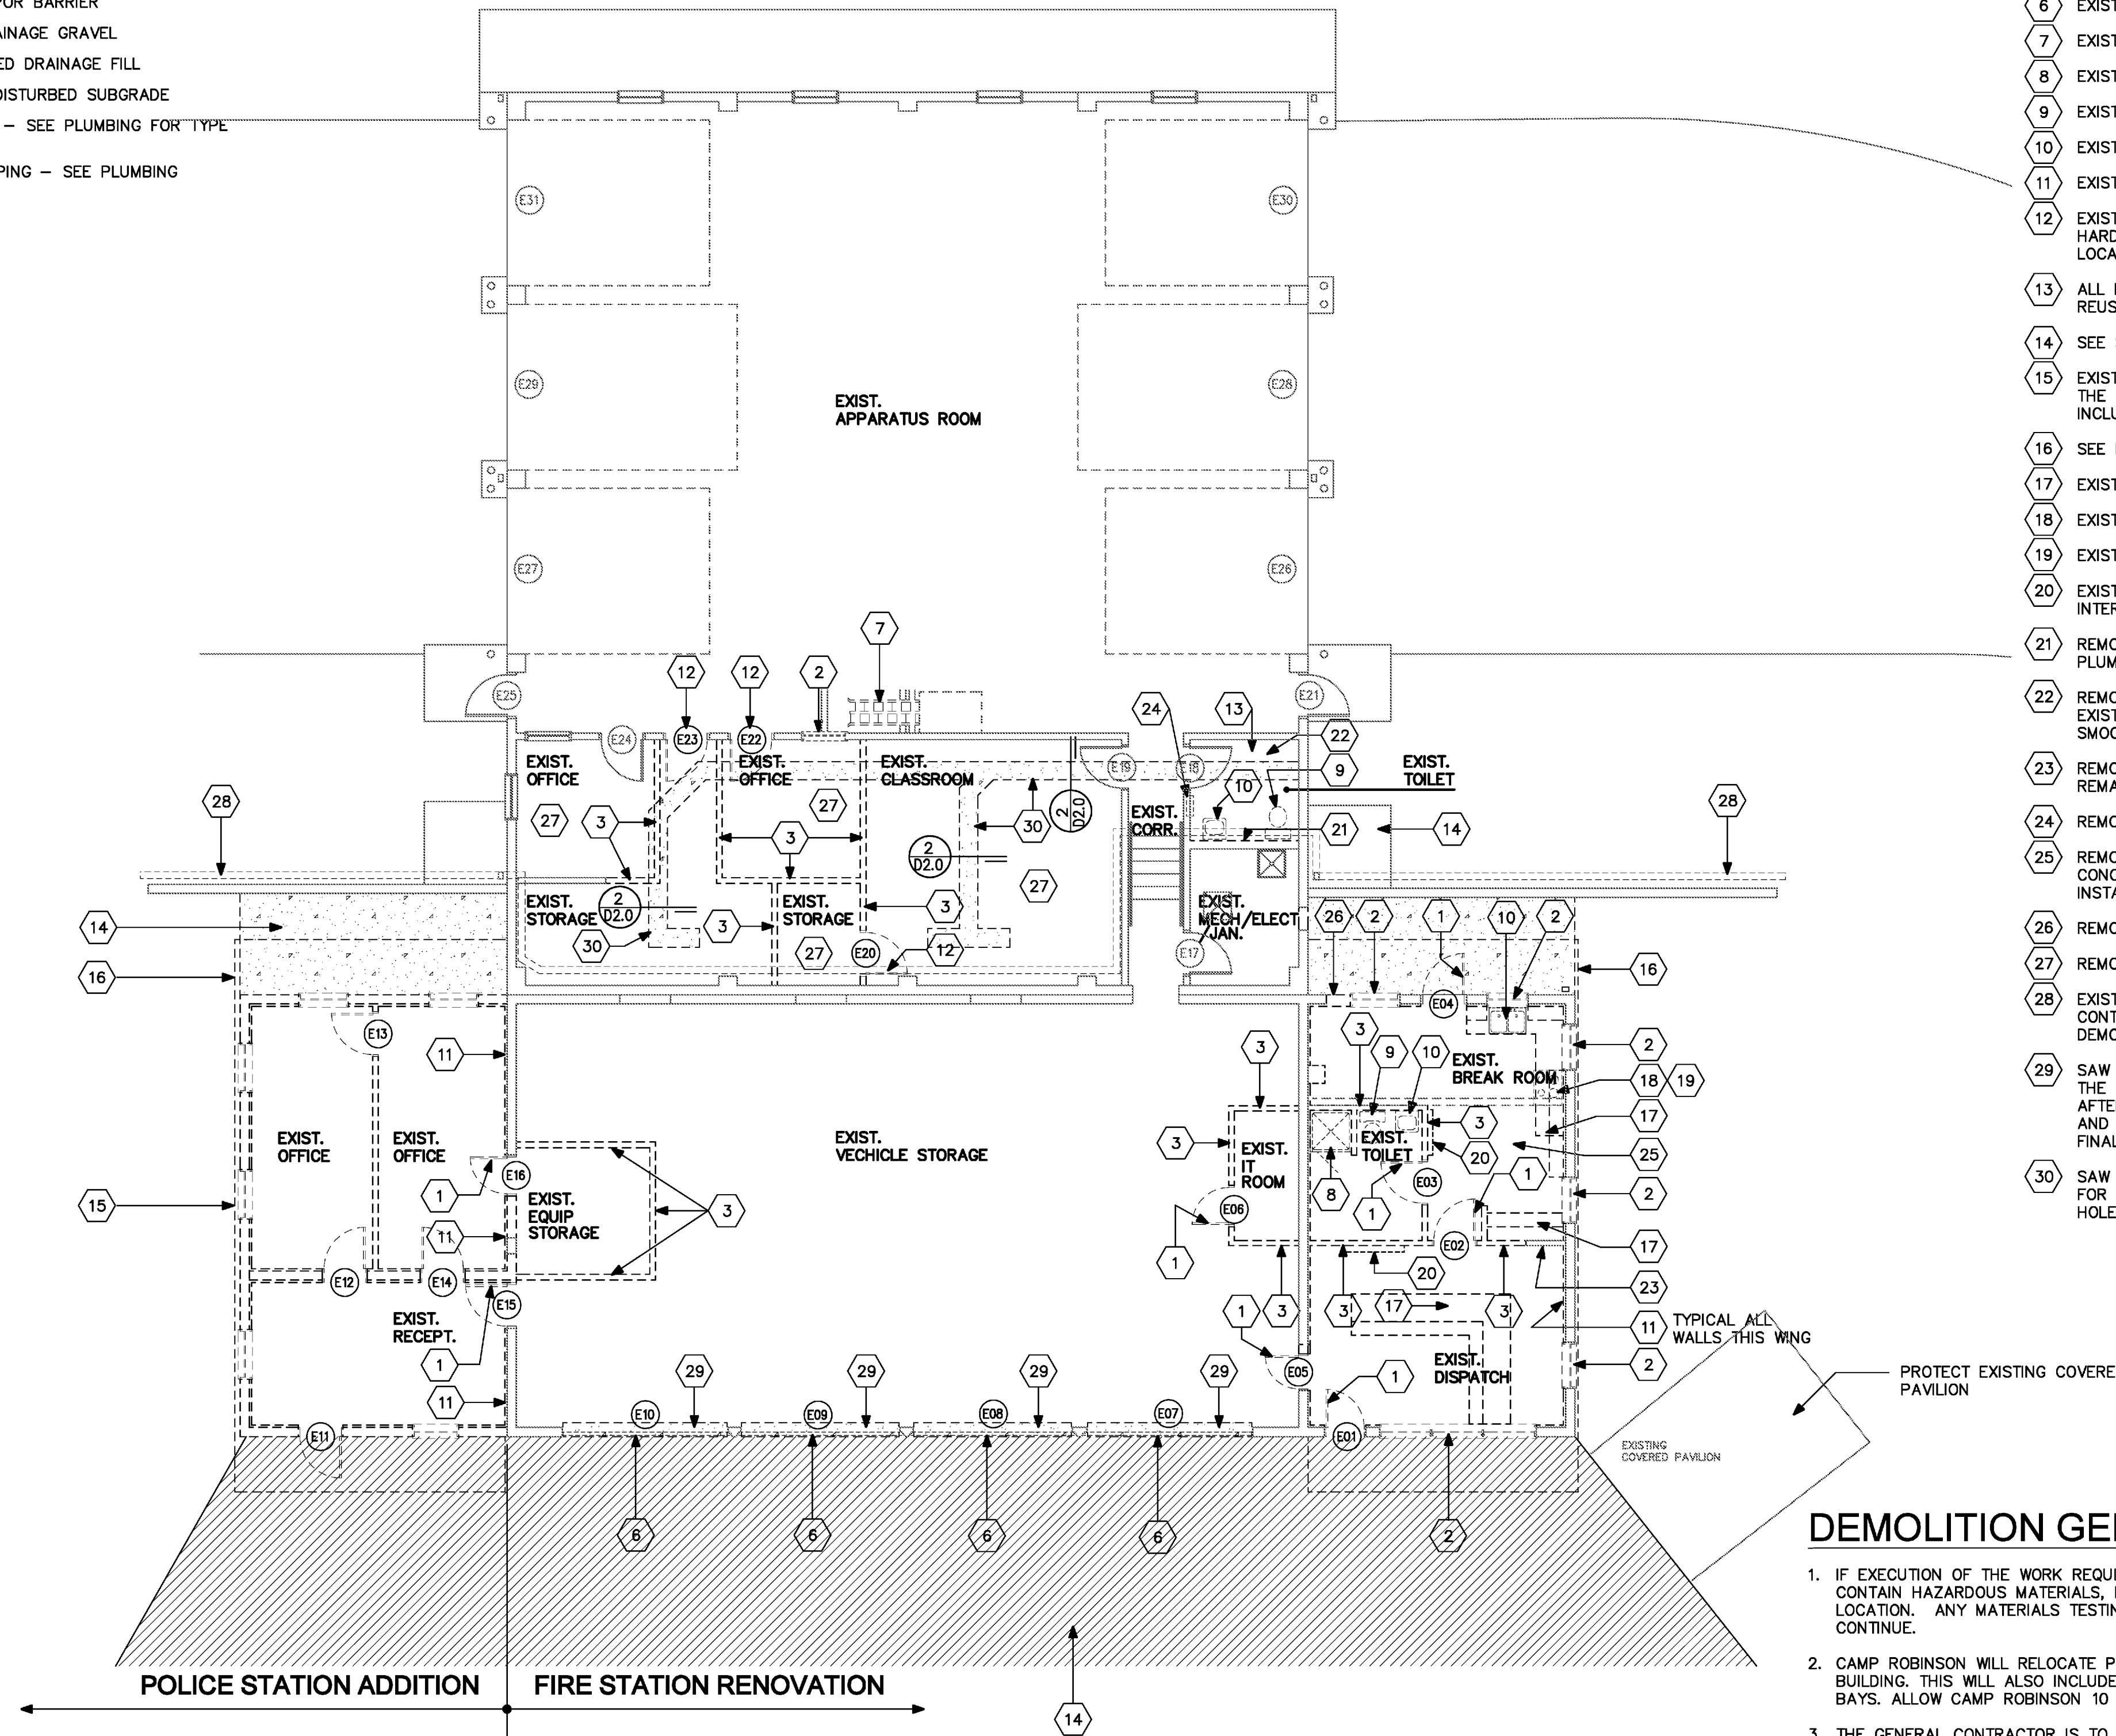

KEYNOTE LEGEND

- 1 EXISTING DOOR / FRAME TO BE REMOVED.
- 2 EXISTING WINDOW, BLOCKING & TRIM TO BE REMOVED.
- 3 EXISTING PARTITION TO BE REMOVED.
- 4 EXISTING EXTERIOR WALL TO BE REMOVED.
- 5 EXISTING ROOF ABOVE TO BE REMOVED.
- 6 EXISTING OVERHEAD DOOR AND TRACK TO BE REMOVED.
- 7 EXISTING SHIP LADDER TO BE REMOVED. DELIVER TO OWNER
- 8 EXISTING SHOWER TO BE REMOVED.
- 9 EXISTING TOILET, SEE MEP DEMOLITION NOTES.
- 10 EXISTING SINK, SEE MEP DEMOLITION NOTES.
- 11 EXISTING GYP BD AND FURRING TO BE REMOVED.
- 12 EXISTING DOOR TO BE REMOVED AND SALVAGED FOR REUSE, SALVAGE HARDWARE ALSO. REMOVE FRAME. SEE DOOR SCHEDULE FOR DOOR LOCATION.
- 13 ALL EXISTING TOILET ACCESSORIES ARE TO BE REMOVED. SALVAGE FOR REUSE: GRAB BARS, MIRROR, SEAT COVER DISPENSER
- 14 SEE SITE DEMOLITION NOTES.
- 15 EXISTING WEST WING TO BE COMPLETELY REMOVED TO THE FACE OF THE WEST WALL OF THE EXISTING VEHICLE STORAGE ROOM. THIS IS TO INCLUDE FLOOR SLAB AND FOUNDATION.
- 16 SEE DEMO RCP AND DEMO ROOF PLANS FOR ADDITIONAL NOTES
- 17 EXISTING MILLWORK TO BE REMOVED.
- 18 EXISTING OVEN/COOKTOP TO BE SALVAGED FOR REUSE.
- 19 EXISTING MICROWAVE TO BE SALVAGED AND DELIVERED TO OWNER.
- 20 EXISTING WALL MOUNTED CASE TO BE SALVAGED FOR REUSE. SEE INTERIOR ELEVATIONS FOR LOCATIONS.
- 21 REMOVE CERAMIC TILE AND GYP. BD. TO EXISTING METAL STUD FOR PLUMBING MODIFICATION, SEE PLUMBING DRAWINGS.
- 22 REMOVE TILE FLOORING AND TILE BASE TO APPROX. 4" A.F.F. REMOVE EXISTING GROUT DOWN TO EXISTING CONCRETE SLAB. SLAB TO BE SMOOTH TO RECEIVE NEW FLOOR FINISH.
- 23 REMOVE EXISTING GYP. BD. FROM EXISTING PARTITION, STUDS TO REMAIN.
- 24 REMOVE EXISTING TRASH RECEPTACLE AND DELIVER TO OWNER.
- 25 REMOVE EXISTING CERAMIC TILE AND GROUT DOWN TO EXISTING CONCRETE SLAB ENTIRE EAST WING. SLAB TO BE SMOOTH FOR INSTALLATION OF NEW FLOOR FINISH
- 26 REMOVE EXISTING BLOCK WALL FOR NEW DOOR.
- 27 REMOVE ALL EXISTING FLOORING AND BASE
- 28 EXISTING 6" PERFORATED PVC DRAIN PIPE BELOW GRADE. GENERAL CONTRACTOR TO FIELD LOCATE AND AVOID DISTURBING DURING THE DEMOLITION AND CONSTRUCTION PHASES OF THE PROJECT.
- 29 SAW CUT AND REMOVE EXISTING CONCRETE 1'-0" WIDE THE WIDTH OF THE EXISTING OVERHEAD DOOR OPENING DOWN 4". CONTACT ARCHITECT AFTER REMOVAL OF ASPHALT PAVING AT OVERHEAD DOOR OPENINGS AND EXPOSING THE EXISTING FOOTING CONDITIONS TO COORDINATE AND FINALIZE DETAILS.
- 30 SAW CUT AND REMOVE PORTION OF EXISTING CONCRETE FLOOR SLAB FOR PLACEMENT OF NEW PLUMBING. SEE DETAIL 2/D2.0 FOR PATCHING HOLE IN EXISTING CONCRETE FLOOR SLAB.

DEMOLITION GENERAL NOTES

1. IF EXECUTION OF THE WORK REQUIRES THE DISTURBING OF ANY SUBSTANCE WHICH APPEARS TO CONTAIN HAZARDOUS MATERIALS, NOTIFY THE OWNER BEFORE CONTINUING WORK AT THE SUSPECT LOCATION. ANY MATERIALS TESTING POSITIVE WILL BE REMOVED BY THE OWNER BEFORE WORK WILL CONTINUE.
2. CAMP ROBINSON WILL RELOCATE PERSONNEL AND EQUIPMENT/FURNITURE FROM THE EXISTING BUILDING. THIS ALSO INCLUDE FIRE TRUCKS, ETC, PRESENTLY STORED IN THE APPARATUS BAYS. ALLOW CAMP ROBINSON 10 WORKING DAYS TO VACATE THE EXISTING BUILDING.
3. THE GENERAL CONTRACTOR IS TO VERIFY EXISTING CONDITIONS. IF ACTUAL CONDITIONS ARE FOUND TO BE OTHER THAN SHOWN IN THE DRAWINGS THE GENERAL CONTRACTOR IS TO NOTIFY THE ARCHITECT OF THE DISCREPANCIES.
4. GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZATION WITH EXISTING SITE CONDITIONS.
5. ALL DIMENSIONS ARE TO FINISH FACE UNLESS NOTED OTHERWISE. DO NOT SCALE DRAWINGS - WRITTEN DIMENSIONS TAKE PRECEDENCE OVER GRAPHIC REPRESENTATIONS. DETAIL DIMENSIONS TAKE PRECEDENCE OVER PLANS AND ELEVATIONS.
6. ALL DIMENSIONS REVISIONS, MODIFICATIONS, AND DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR REVIEW AND CLARIFICATION PRIOR TO THE INSTALLATION OF THE WORK.
7. GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF EXISTING FINISHES TO REMAIN. GENERAL CONTRACTOR SHALL PROVIDE A WRITTEN ASSESSMENT TO INCLUDE PHOTOGRAPHS OF EXISTING DAMAGE NOT TO BE HELD ACCOUNTABLE FOR.
8. GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF EXISTING UTILITIES NOT SCHEDULED FOR REMOVAL AND SHALL BE RESPONSIBLE FOR THE REPAIR OF DAMAGED UTILITIES.
9. DASHED LINES INDICATE ITEMS TO BE REMOVED UNLESS NOTED OTHERWISE.
10. OWNER TO REMOVE ALL FURNISHINGS PRIOR TO THE START OF WORK.

1 DEMOLITION FLOOR PLAN
1/8" = 1'-0"



REVISIONS

ISSUE DATE

JULY 1, 2016

PROJECT NO.

0901U

CONTENTS

DEMOLITION
FLOOR PLAN

SHEET NUMBER

D2.0